
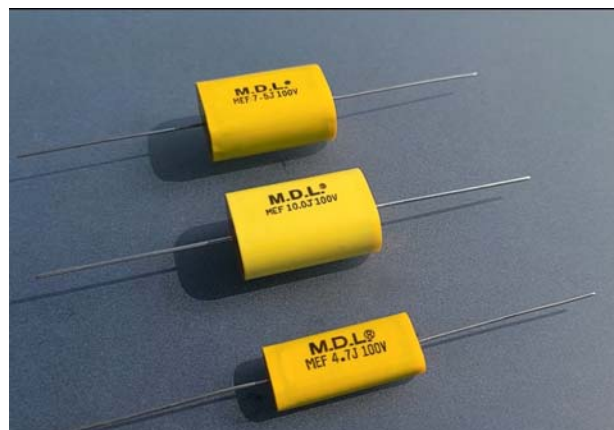


MEFAxial lead, Oval
Series

■ 1) Dimensions(外觀型式):
(臥式橢圓柱型)

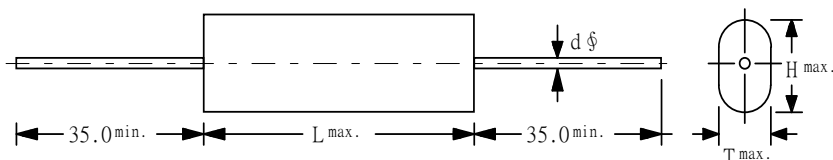

■ 2) Specifications(產品特性):

- (a) Capacitance Tolerance (容量誤差) : $\pm 10\%$ (K) OR $\pm 5\%$ (J) at 1K HZ
- (b) MAX Dissipation Factor (最大損失角) : MAX 1% at 1K Hz 25°C
- (c) Temp Range (工作溫度範圍) : -40°C ~ +105°C*
- (d) Insulation Resistance(絕緣值) : 5,000 M Ω x μ F
10,000 M Ω Min.
- (e) Life Test (壽命測試) : 500 Hours at 85°C at 150% Rated Voltage
(印加150%的工作電壓於85°C/500小時)
- (f) Pull Test (拉力測試) : Will sustain 2 kgs steady pull in the direction of lead egress and 1 kg steady pull at any 90 degree angle for 60 seconds. After test, capacitor shall show no evidence of damage and pass all electrical requirements.

■ 3) MAX SIZE(本體最大尺寸表 L x H x T)

Unit : mm

W.V.	100 VDC				250 VDC			
SIZE	L max.	H max.	T max.	ϕ d	L max.	H max.	T max.	ϕ d
CAP. (F)								
1.0	21.0	11.0	6.5	0.8	27.0	13.0	8.0	0.8
1.5	27.0	11.5	6.5	0.8	27.0	15.5	9.0	0.8
2.2	27.0	13.5	8.0	0.8	32.0	16.0	9.0	0.8
3.3	27.0	16.0	9.5	0.8	32.0	19.0	11.0	0.8
4.7	32.0	16.0	9.0	0.8				
6.8	32.0	19.0	10.0	0.8				
10.0	32.0	22.0	14.0	0.8				

ANY SPECIAL VALUE ARE ACCEPTABLE, ITS SIZE TO BE PROVIDED UPON REQUESTED
SIZE MAYBE CHANGED W/O NOTICE. SPECIAL SIZE IS ACCEPTABLE

■ 如有需特殊尺寸 / 容量-請洽本公司.

■ 以上為參考尺寸,如有更動不另行通知

■ <https://WWW.MDL.COM.TW>