


MPFAxial lead, Oval
Series

■ 1) Dimensions:

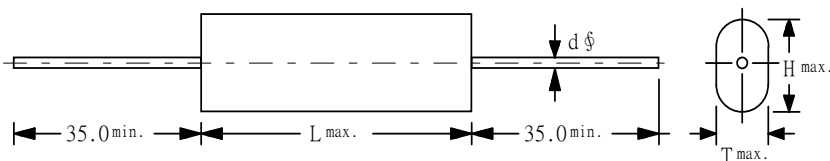

■ 2) Specifications:

(a) Capacitance tolerance : $\pm 10\%$ (K) or $\pm 5\%$ (J) at 1K HZ

(b) Dissipation factor : Max 0.1% at 1KHZ.

(c) Temperature range : - 40 °C to +85 °C

*Full-rated voltage at 85°C - Derate linearly to 50%-rated voltage at 105°C

(e) INSULATING RESIS : 10,000 M Ω x μ F
30,000 M Ω Min.

(f) LIFE TEST : 150% of rated working voltage at 85 °C for 1,000 hours.

■ 3) MAX SIZE(D x L)

Unit : mm

VDC MFD	100 VDC				250 VDC				400VDC				630VDC			
	L $\pm$ 2	T $\pm$ 2	H $\pm$ 2	ϕ d	L $\pm$ 2	T $\pm$ 2	H $\pm$ 2	ϕ d	L $\pm$ 2	T $\pm$ 2	H $\pm$ 2	ϕ d	L $\pm$ 2	T $\pm$ 2	H $\pm$ 2	ϕ d
0.1	14	5	8	0.6	14	5	8	0.6	19	7	10.5	0.6	25	6.5	13	0.6
0.22	14	6.5	9.5	0.6	19	5	9	0.6	25	6.5	12.5	0.6	25	10	17	0.6
0.33	14	8.5	13	0.6	19	8.5	13	0.6	25	8.5	14	0.6	25	12.5	19	0.6
0.47	19	6	9.5	0.6	25	6.5	11	0.6	25	10	16.5	0.6	25	15	21	0.6
0.68	19	8	12	0.6	25	8	11.5	0.6	31	9.5	16	0.6	36	15	23	0.6
1.0	25	7	11.5	0.8	31	8.5	12	0.8	31	13	18	0.8	40	17	23	0.8
2.2	31	9.5	13	0.8	31	11	17.5	0.8	46	14.5	21	0.8	56	19.5	27.5	0.8
3.3	31	10.5	17	0.8	31	13.5	19.5	0.8	46	18	25	0.8	56	25	33	0.8
4.7	31	13	19	0.8	31	16.5	22.5	0.8	46	22	29	0.8	56	29.5	37	0.8
5.6	31	14.5	20.5	0.8	36	16	23	0.8	46	24	32	0.8	56	33	40.5	0.8
6.8	46	12	18	0.8	46	15.5	22	0.8	46	26	34	0.8	56	36	44	0.8
8.2	46	13	19	0.8	46	16.5	23.5	0.8	46	29	37	0.8	56	40	48	0.8
10.0	46	15	21	1.0	46	18.5	25	1.0	56	29	37	1.0	65	40	48	1.0
15.0	46	20	25	1.0	56	21	27.5	1.0	56	38	46	1.0				
22.0	56	22	26	1.0	56	24.5	30	1.0								
30.0	56	23.5	29.5	1.0	56	28	35	1.0								
33.0	56	27	31	1.0	61	30	35.5	1.0								
47.0	56	34	37	1.0	61	36.5	41	1.0								
68.0	61	39	46	1.0												

ANY SPECIAL VALUE ARE ACCEPTABLE, ITS SIZE TO BE PROVIDED UPON REQUESTED
SIZE MAYBE CHANGED W/O NOTICE. SPECIAL SIZE IS ACCEPTABLE

■ 如有需特殊尺寸 / 容量-請洽本公司.

■ 以上為參考尺寸,如有更動不另行通知.

■ <http://WWW.MDL.COM.TW>